




1 - CONSTRUCTION

- It is made of fibreglass tape Ref : S/N C - thickness : 0,20mm with a hard braid on one side in purpose of getting the binding stop.
- S 23 : Cord is sewn at the same time as weaving of tape.
- S 23/1 : Cord is manually sewn into the folded tape.



2 - CHARACTERISTICS

S 23		CORD		LENGTH per BOBBIN meter	S 23 / 1		CORD		LENGTH per BOBBIN meter
REFERENCE	WIDTH of TAPE mm	∅	REFERENCE		REFERENCE	WIDTH of TAPE mm	∅	REFERENCE	
S23 - 30x2	30	2.5	S 095	200	S23/1 - 30x3	70	3	S 097	100
S23 - 40x3	40	3.0	S 097	200	S23/1 - 30x6	70	5	S 094	50
S23 - 40x4	40	4.0	S 096	200	S23/1 - 40x6	90	5	S 094	50
					S23/1 - 40x8	90	8	S 113	50
					S23/1 - 50x6	110	5	S 094	50
					S23/1 - 60x5	130	4	S 096	50
					S23/1 - 60x7	130	8	S 112	50
					S23/1 - 60x8	130	8	S 113	50
					S23/1 - 80x8	168	8	S 113	50

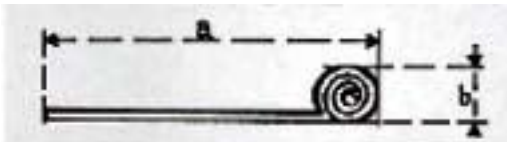

- a = Width of tape with cord included.
- b = Diameter of cord. (roll).

3 - APPLICATIONS

- This binding stop is obtained under the first layers of the pre-impregnated tape in order to make the binding at coil end and to prevent the binding from slipping backwards. The diameter of the roll is determined according to the importance of the thickness of the binding.



4 - PRESENTATION

- Standard widths: please refer to the chart above.
- other widths : please question us.
- Colour : unbleached.
- Conditioning : jaws bobbins.
- Length per bobbin : please refer to the chart above.

We recommend to protect them from dust, humidity at an ambient temperature.