



TERYL® EDGED TAPE WITH TEXTURED YARN

1/1

01/03

G 9

1 - CONSTRUCTION

- Woven tape with a 100% "textured" polyester yarn in wrap and weft, which gives swelling to tape.
- Woven tape with slevedges.




2 - CHARACTERISTICS

SPECIFICATION	UNIT	T 022	T 155	T 224	T 250
- Thickness	mm	0.45	0.30	0.40	0.45
- Width	mm	13 à 60	10 à 40	10 à 40	10 à 40
- Weight per meter	g/cm Width	2.0	1.30	1.70	1.90
- Shrinkage 1 h at 140 °C	%	6	≥ 12	12	12
- Breaking Resistance	daN/cm	40	20	30	35
- Weaving		SERGE	TOILE	SERGE	SERGE

- 2 qualities : Unbleached - Treated : waterproof or stiffening "A.R.I".
 - 3 treatments A.R.I : A.R.I.L : light - A.R.I : standard - A.R.I.D : hard

3 - APPLICATIONS

- Electrotechnical industry, clothing industry, luggage industry, slippers, camping articles (bording tapes for tents).
- Can replace a cotton serge tape. Many usings in industry. Tape slightly shrinkable.

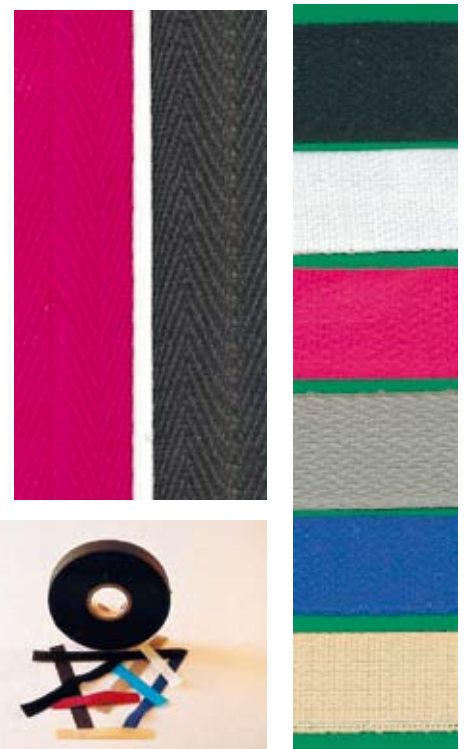

4 - PRESENTATION

- Conditioning: jaws bobbins or rolls.

- Colours :

Electrotechnical : unbleached.

Others: red, black, dark green, yellow, green of army, royal blue, grey, navy blue, light blue, beige, purple, carmine, turquoise, bright green, fuschia, light beige, light grey, orange, dark grey.



We recommend to protect them from humidity at a temperature between - 10 and + 30 °C.