

### 1 - CONSTRUCTION

- Support : Smooth paper for the ref. R 104.  
Finely crimped paper for the ref. R 513.  
Polyester film 50 $\mu$  for the ref. R 295.



### 2 - CHARACTERISTICS


SPECIFICATION	UNIT	R 104	R 513	R 295
Total Thickness	mm	0.12 $\pm$ 0.01	0.14 $\pm$ 0.01	0.08 $\pm$ 0.01
Temperature of use	°C	80 maxi	50 maxi	200 maxi
Adhesive Strength on Steel	N/cm	2.7	3.0	3.9
Breaking Elongation	%	9	4	100
Breaking Resistance	N/cm	30	35	90
Adhesive mass		Rubber	Rubber	Silicone
Colour		Beige	Beige	Green

### 3 - APPLICATIONS

- External insulation of bobbins ( small motors ).
- For masking in painting industry, coachbuilding.
- For holding insulated products on inductor bobbins.
- Multi-uses in industry.

### 4 - PRESENTATION

- Standard widths :  
Ref R 104 : 15 - 19 - 25 - 30 - 38 - 50 mm.  
Ref R 513 : 19 - 25 - 30 - 38 - 50 - 75 mm.  
Ref R 295 : from 12 to 75 mm.
- Meters per roll :  
50 M on 76 mm cores for ref R 513 - R 104.  
66 M on 76 mm core fir ref R 295.
- Lifetime : 12 months.  
We recommend not to exceed this date.

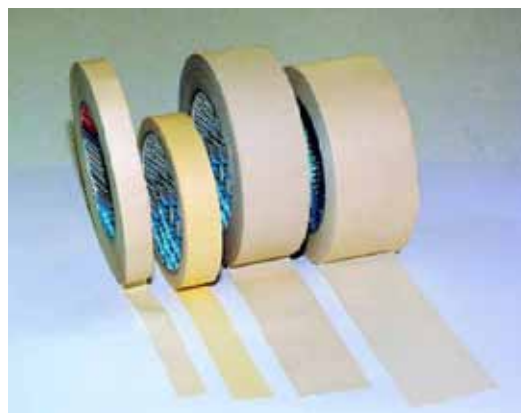

We recommend to protect them from heat, humidity and at a temperature between + 10 and + 30°C.