


**1 - CONSTRUCTION**

- Flat braid made of continuous polyester yarns.
- Thermal class F 155°C
- The braid is like a hollow and flat tubular.

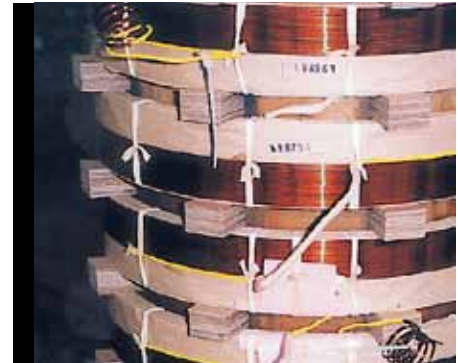

**2 - CHARACTERISTICS**

REFERENCE	WIDTH mm	WEIGHT g/m	BREAKING RESISTANCE daN/cm	2/3 BREAKING ELONGATION %	SHRINKAGE %	LENGTH PER BOBBIN
T 056	3	1.4	70	15	2	800 M
T 060	5	2.6	110	10	10	500 M
T 061	2	0.8	35	15	2	1000 M
T 106	6	4	500	15	10	300 M
	8	7	500	15	10	150 M
	10	10	500	15	10	250 M
	12	12	500	15	10	250 M
	14	14	550	15	10	200 M
	16	18	550	15	10	175 M
	18	21	550	15	10	300 M
	20	27	550	15	10	300 M
	22	29	550	15	10	300 M
	24	30	550	15	10	200 M
	26	43	650	15	10	200 M
30	48	700	15	10	200 M	
35	55	750	15	10	175 M	
T 150	3	1.8	100	8	8	800 M

**3 - APPLICATIONS**

- All bindings, bandings, with shrinkage on motors, transformers, thermal class F.
- Good impregnation power.
- Does not provoke hitching sensations.



**4 - PRESENTATION**

- Standard widths : Refer to the chart above.
- Other widths : please question us.
- Colour : white.
- Conditioning : plastic jaws bobbins.
- Length per bobbins : Refer to the chart above.

We recommend to protect them from dust, humidity, at an ambient temperature.