

1 - CONSTRUCTION

- Woven tapes an wrap and weft with a 100% cotton yarn .
- Woven tapes with slevedges.

**2 - CHARACTERISTICS**


SPECIFICATION	UNIT	C 29	C 43	C 23	C 19
- Thickness	mm	0.70	0.50	0.30	0.55
- Tolerance on thickness	mm	± 0,05	± 0,03	± 0,02	± 0,03
- Weight / meter	g/cm	3.00	2.20	1.10	2.35
- Tolerance on weight	g/cm	± 0,4	± 0,3	± 0,2	± 0,3
- Breaking Resistance	daN/cm	> 15	> 10	> 5	> 13
- Weaving		SERGE	SERGE	TOILE	SERGE
- Nb of Yarns on Wrap	/cm	28	30	20	35
- Nb of Yarns on Weft	/cm	11	13	10	12

3 - APPLICATIONS

- Insulation of class B small motors.
- Fastening, bobbins binding.
- used like strap in packaging, portorage strap for box.
- Multi-use in industry.

4 - PRESENTATION

- Standard widths :
C 29 : 17 mm.
C 43 : 10 - 20 - 25 - 30 - 40 mm.
other widths, please question us.
- Colour : fawn coloured .
- Length per roll :
20 - 50 - 100 m.

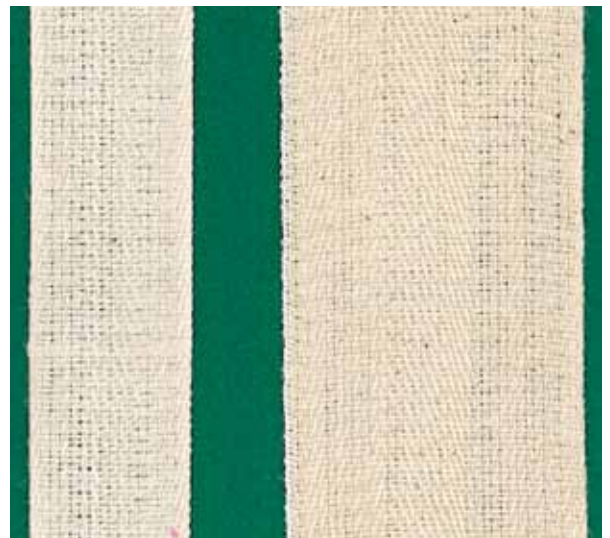

We recommend to protect them from humidity, at a temperature between + 10 and + 30 °C